


## PIN CONFIGURATION AND WIRING DATA SHEET


30 Cable Plug

46-22

30-PIS-46

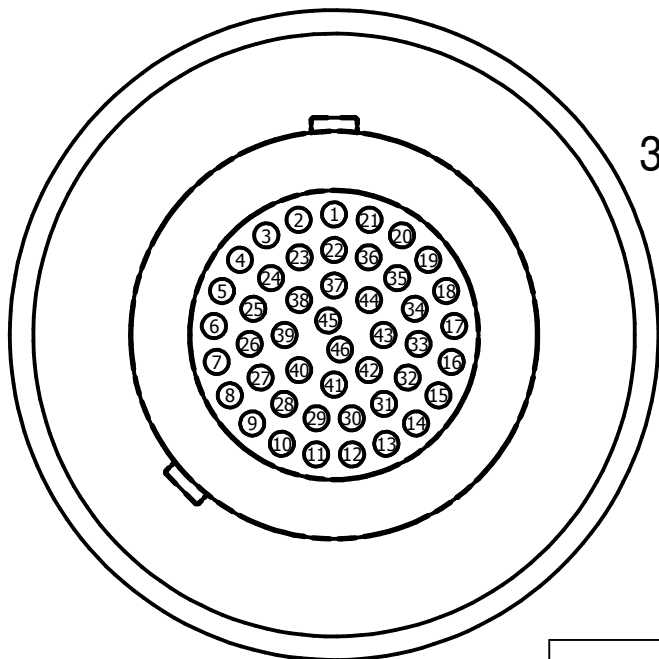

FACE VIEW


 REAR VIEW  
(INSERT)

MAXIMUM			
	CURRENT	VOLTAGE	WIRE SIZE
#22	2A	500 V	22 AWG

NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE	NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE
1					17				
2					18				
3					19				
4					20				
5					21				
6					22				
7					23				
8					24				
9					25				
10					26				
11					27				
12					28				
13					29				
14					30				
15					31				
16					32				





PROJECT


CONNECTOR

LOCATION

PIN CONFIGURATION AND WIRING DATA SHEET  
 30 Cable Plug  
 46-22

30-PIS-46

NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE	NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE
33									
34									
35									
36									
37									
38									
39									
40									
41									
42									
43									
44									
45									
46									



**BIRNS, INC. 1720 Fiske Place Oxnard, California 93033-1863**  
 T: (805) 487-5393 F: (805) 487-0427 Toll-Free 1.888.BIRNS.88  
 NRC 10CFR50, App B Compliant ISO 9001:2008-Certified  
[www.birns.com](http://www.birns.com)