PROJECT	CONNECTOR
LOCATION	

PIN CONFIGURATION AND WIRING DATA SHEET

3O Cable Plug

3-10, 1-16 & 4-20

3O-PIS-8

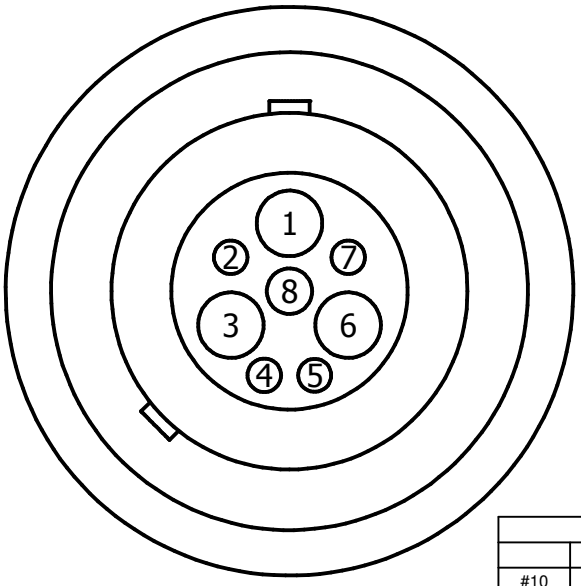

FACE VIEW

MAXIMUM			
	CURRENT	VOLTAGE	WIRE SIZE
#10	33A	500 V	10 AWG
#16	12A	500 V	14 AWG
#20	4A	500 V	16 AWG



REAR VIEW
(INSERT)

NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE	NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE
1									
2									
3									
4									
5									
6									
7									
8									

BIRNS, INC. 1720 Fiske Place Oxnard, California 93033-1863
T: (805) 487-5393 F: (805) 487-0427 Toll-Free 1.888.BIRNS.88
NRC 10CFR50, App B Compliant ISO 9001:2008-Certified
www.birns.com

8/10/2012