PROJECT | CONNECTOR

LOCATION

PIN CONFIGURATION AND WIRING DATA SHEET

3T Cable Plug
2 Fibers,8-14 & 4-22

3T-PIS-2F12

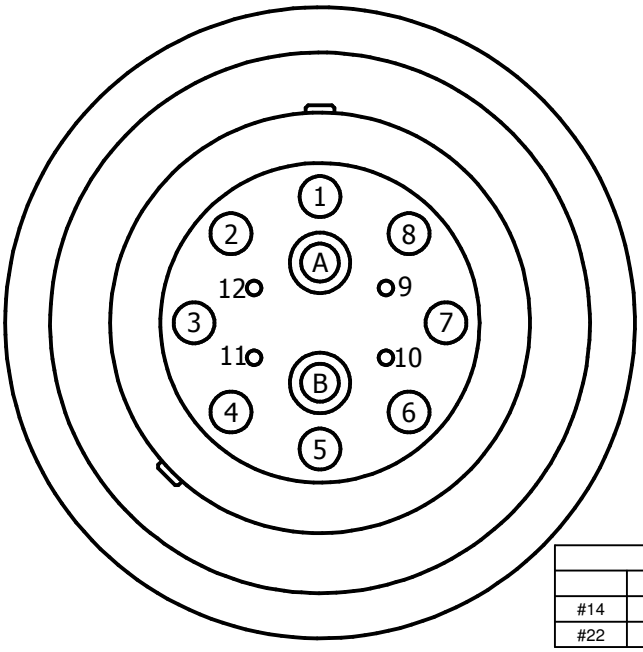

FACE VIEW

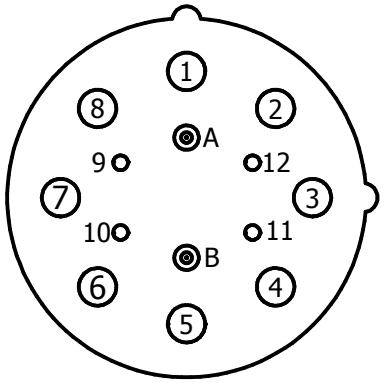

REAR VIEW
(INSERT)

MAXIMUM			
	CURRENT	VOLTAGE	WIRE SIZE
#14	15A	3600 V	14 AWG
#22	2A	500 V	22 AWG

Letters designate fiber connections

NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE	NO.	DESCRIPTION	WIRE/ FIBER	CURRENT/ FREQUENCY	VOLTAGE/ MODE
A									
B									
1									
2									
3									
4									
5									
6									
7									
8									
9									
10									
11									
12									

BIRNS, INC. 1720 Fiske Place Oxnard, California 93033-1863
T: (805) 487-5393 F: (805) 487-0427 Toll-Free 1.888.BIRNS.88
NRC 10CFR50, App B Compliant ISO 9001:2008-Certified
www.birns.com